

FABRICS





STANDARD FABRICS



Black (F641-701)


Black (F641-701)

Black (9400)


Black (60999)



STANDARD COLORS

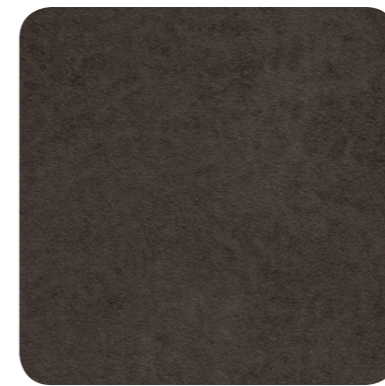

Anthracite (6422)

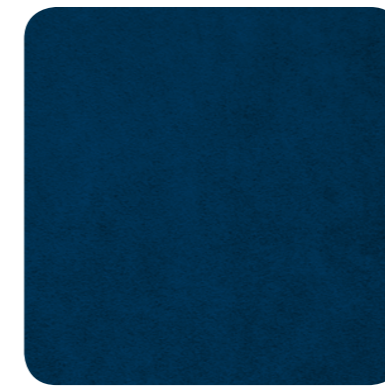

Commodore Blue (6503)



Goya Red (3096)

CUSTOM COLORS



Cadmium-Orange (4025)



Ruby-Red (4048)



Lila (6601)



Ice (1042)



Mandarin (1047)



Anthracite (6422)



Anthracite (6422)



Anthracite (6422)



Anthracite (6422)




Anthracite (6422)



Anthracite (6422)



Anthracite (6422)



Anthracite (6422)



Anthracite (6422)



STANDARD FABRICS SPECIFICATIONS

Nordic Wool

Composition: 88 % Wool, 12% Polyamide
 Weight: 400 g/m²
 Abrasion resistance: EN ISO 12947-2/ - 120.000 rubs Martindale
 Pilling resistance: EN ISO 105x12, 4 (7000 cycles)
 Flammability: BS EN 1021-1:2006 (cigarette), BS EN 1021-2:2006 (match) BS5852: Part 1:1979: Source 0 BS5852: Part 1:1979: Source 1*
 Colour fastness to light: EN ISO 105-B02 - 5-6
 Colour fastness to rubbing: EN ISO 105x12, wet/dry, 4/5
 Wool is antistatic and does not attract dirt like other fabrics. We recommend gentle vacuuming, preferably every week, with a soft nozzle. Wool is naturally resistant to dirt and fire. Most spots can be removed with lukewarm water possibly added a neutral detergent.

Skai Palma

Composition: 89% PVC-compound, 11% CO/PES knitted fabric
 Weight: 825 +/- 50 gr/m²
 Thickness: 1,3 +/- 0,2 mm
 Martindale Abrasion: DIN EN ISO 5470-2: > 50.000
 Flame retardant types: BS5852 IS-0+1, DIN4102 (Part 1, B2), DIN53438 (Part 2), EN1021-1+2 MVSS302NF M2 f
 Flame retardant, long-lasting, lightfast, abrasion-resistant, tear-resistant, steam permeable, resistant to urine and blood, easy to clean, resistant to disinfectants.

Alcantara

COMPOSITION	ALCANTARA®	POLYESTER	68 ± 3 %
		POLYURETHANE	32 ± 3 %
	BACKING	COT/KANECARON®	45/55 %
WEIGHT		EN 29073-1	≥ 450 G/M2
TEAR RESISTANCE		EN ISO 13937-3	≥ 30 N
MARTINDALE ABRASION 12KPA		EN ISO 12947-4	≥ 20000 CYCLES
	END POINT	EN ISO 12947-2	≥ 150000 CYCLES
FLAME RESISTANCE		BS 5852 CRIB 5 (Sect3)	PASS
PILLING RESISTANCE	2000 CYCLES	EN ISO 12945-2	≥ 4/5
COLOR FASTNESS			
	TO LIGHT	EN ISO 105-B02	≥ 5 BLUE SCALE (1-8)
	TO DRY CLEANING	TONE CHANGE AATCC-132	≥ 4 GREY SCALE (1-5)
		STAINING AATCC-132	≥ 3 WHITE SCALE (1-5)
	TO RUBBING	DRY EN ISO 105-X12	≥ 4 WHITE SCALE (1-5)
		WET EN ISO 105-X12	≥ 3 WHITE SCALE (1-5)
	TO WATER	TONE CHANGE EN ISO 105-E01	≥ 4 GREY SCALE (1-5)
		STAINING EN ISO 105-E01	≥ 3.5 WHITE SCALE (1-5)

Result of a unique, proprietary technology, Alcantara® is a thoroughly avant-garde material with aesthetic, technical and sensory qualities that no other material can equal.